

White Box Switch

M2-W6920-4S


Overview

The Micas M2-W6920-4S data center switch offers 128-port 100GbE interface in 4RU chassis, which delivers the highest performance combined with complete L2 and L3 forwarding feature in modern large-scale datacenter networks.

M2-W6920-4S is based on Broadcom BCM56980 (Tomahawk 3) 12.8Tb/s switch ASIC with maximum port density while consuming minimum power and latency. The M2-W6920-4S switch supports latency as low as 700ns in cut-through mode, and a 64 MB packet buffer with a large shared pool allowing for superior burst absorption compared to systems with fixed port buffering. M2-W6920-4S supports industry standard 100G optics and cables. All ports allow a choice of speeds including 100GbE or 40GbE, up to 128 interfaces.



Front View

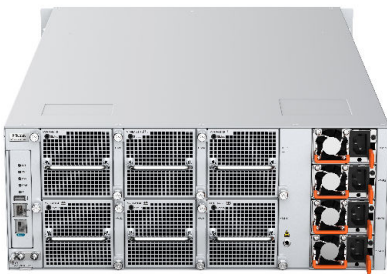

Back View (Front-to-Rear Airflow)

Product Highlights

First-class Performance

- 128 × QSFP28 100G Ports
- Up to 25.6 Tbps full duplex
- Up to 8 Bpps

Robust Configuration

- Broadcom BCM56980 (Tomahawk 3)
- Intel Xeon D-1527 Processor (Formerly Broadwell DE)
- 8GB DRAM

Data Center Oriented Design

- Typical power of under 5W per port
- 2+2 redundant & hot-swappable power

- 5+1 redundant & hot-swappable fans

Cloud Networking Ready

- Shared 64MB Buffer with burst absorption
- MAC Addresses: 8 K
- VLAN : 4 K

*The above table is the maximum capacity that the switching chip can provide.

Fully-loaded Software Functions

- BGP, route policies, ARP in host routing, load balance based on LAG/ECMP

Specifications

Switch Model	M2-W6920-4S
Ports	128×100GbE QSFP28
Max 100GbE Ports	128
Max 50GbE Ports	-
Max 40GbE Ports	128
Max 25GbE Ports	128
Max 10GbE Ports	128
Max 1GbE Ports	-
Console ports	1
USB Ports	1
Switching Capacity	25.6Tbps
Packets/Second	8 Bpps
CPU	Intel Xeon D-1527
System Memory	8GB (Up to 32GB)
System Storage	240GB
BMC Option	AST2520
Switch ASIC	Broadcom BCM56970(Tomahawk 3)
Packet Buffer	64MB
Temperature Alarm	Supports temperature alarm and overtemperature protection
Power Supplies	4 (2+2 redundant, hot-swappable)
Fans	6 (5+1 redundant, hot-swappable)
OS	SONiC
Airflow Options	Standard* airflow
Max/Typical Power Consumption	1950W/1469W
Dimensions (W x D x H)	17.40×28.9×6.83 in. 440×580×86 mm 2RU
Weight (with all modules)	106.26 lbs (48.2kg)

* Standard: Front to rear

Network Operating System

This product supports SONiC, a leading open networking operating system. Micas Networks provide various SONiC offerings, including customization and integration services. Learn more about the offers at the Micas Networks dedicated page.

Power Supply

Model	PA1300 I-F
Input Connector	IEC 320-C14
Output Power:	1300W
Input voltage :	100-240 VAC
Frequency	50-60 Hz
DC Input High-voltage:	180-310VDC
DC Input Current	6A (DC)
Efficiency	94% Platinum
Typical Input Current	13.8A (100V AC ~ 127V AC) 8.5A (200V AC ~ 240V AC)

Standard Compliance

EMC Standards	FCC CFR Title 47, Part 15, Subpart B ICES-003 Issue 7 ANSI C63.4
Safety	EN 62368-1 IEC 62368-1
Certifications	FCC; IC; cTUVus; CB

Environmental

Operating Temperature	32 to 104° F (0 to 45°C)
Storage Temperature	-40 to 158° F (-40 to 70°C)
Operating Humidity	10% to 90% RH (Non-condensing)
Altitude (Operating)	0~1800m, (1800~5000m): When the altitude increases by 220m, the maximum temperature decreases by 1°C

Order Information

Switch

Model

M2-W6920-4S-FA

Product Description

M2-W6920-4S switch, 4 slots, 4×AC power modules, 6×fan modules, front-to-rear airflow.

Standard airflow is supported

WM6900-32C

32×100GbE line card

Fan and Power Supply

Model

P2EFAN I-F

Product Description

Fan module, front-to-rear airflow.

PA1300 I-F

AC power supply module, front-to-rear airflow.

Products	Hardware Support			Support (OS/Firmware)	Remote Technical Support	
	Warranty Period	RMA/DOA - Return for Repair (RFR)*	Advance Hardware Replacement (AHR)*	Software Updates	TAC Support	Online Self-Services Support
M2-W6920-4S	3 Year	9×5×15CD-Ship		✓	✓	✓

Support Service

Micas Networks will continue to iterate the HULKOS system through continuous technical innovation. HULKOS will continuously provide customers.

Device maintenance service

- 9x5x15CD-Ship Basic RFR Service
- 9x5xNBD Standard AHR Service
- 10x7xND Silver AHR Service
- 24x7x4 Golden AHR Service
- 9x5xNBD Standard Onsite Service
- 10x7xND Silver Onsite Service
- 24x7x4 Golden Onsite Service

System integration service

- Hardware Installation Service
- Software & Network Configuration Service

Value-added service

- Critical Moment Onsite Support
- Man-day Service

For more information

+1(855) 702-0551 | info@micasnetworks.com

250 W Tasman Dr. Ste 170, San Jose, CA 95134

www.micasnetworks.com or contact your local Micas Networks sales representative